SL 608 Outdoor

for outdoor and indoor use

SL 608 Outdoor lifts up to 608 kg

suitable for outdoor use

SL 608 Outdoor is suitable for outdoor lifting assignments for example on construction sites.

The lift is the second most powerful in the Smartlift range with a lifting capacity up to 608 kg.

- Off road with front-whell drive
- Manoevrable with dual rear wheels
- Foam filled tyres
- Self-driven
- Electronic brake
- Lifting height 2950 mm (centre of yoke)
- 2 vacuum circuits with 2 pumps
- 4 Suction pads Ø 400 mm
- Ergonomic operation handle
- Waterproof according to ip65



Larger window sections and heavier windows with up to three layers of glass still call for even stronger lifting capacity. SL 608 Outdoor is a new power lift in the Outdoor range and in terms of size it is positioned between the SL 380 Outdoor and the SL 780 Giant

The Smartlift is easily transported in a van or on a trailer



N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk

www.smartlift.dk



SL 608 Outdoor

The lift has 100 mm sideshift for accurate adjustment when fitting the window





The vacuum system is separated into two vacuum circuits for highest security. Showing vacuum circuits with blue and red vacuum hoses


For high security the stabilizers of the lift are equipped with mandrels to fasten on stable ground for better stability.

Technical data



The yoke has movements in all directions




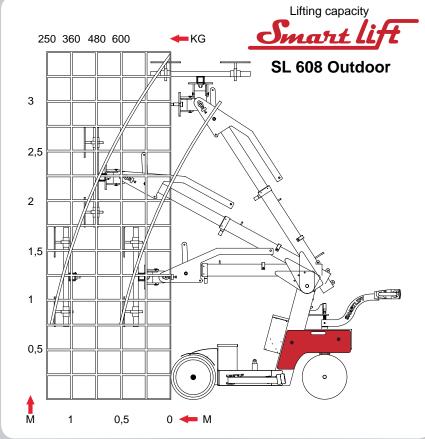

Value Description 850 kg Weight Height 1530 mm Width (min) 840 mm Length (min) 2340 mm Extension of arm 700 mm 30° back/95° forward Tip from horizontal Stepless high/low Speed regulation Sideshift 100 mm Vacuum system 2 circuits Lifting height mounting 3500 mm Charging voltage 230 volt Integrated charger Victron Energy Charging time Approx 8 hours Battery(2 x 12v) 24 volt 2 x 105 A Running period Approx 20 hours Front-wheel drive 1200 Watt - AC Brake Elektronic

4 unit Ø 400 mm

608 kg/280 kg

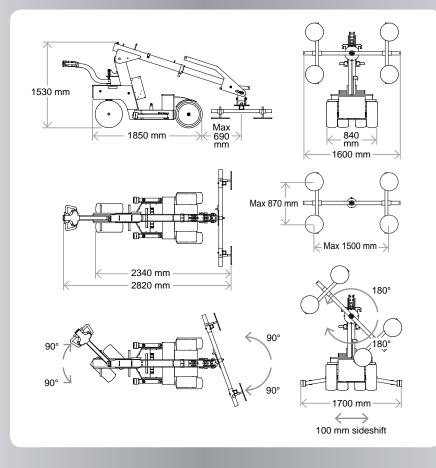

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk

www.smartlift.dk

Suction pads

Lifting capacity arm

in/extended (700 mm)

