

Giant lifting  
height  
and reach

# SL 780 Outdoor Giant

Another rough terrain machine  
for outdoor and indoor use



## Lifts and handles almost a tonne

Large window sections for  
your new building is easily  
and precisely lifted by the  
SL 780 Outdoor Giant.



*The wide tires  
make the machine  
extremely suitable  
for cross-country  
use*

*The Smartlift  
shows its strength*

- 2 vacuum circuits with 2 pumps
- For rough terrain with frontwheel drive and big wheels. Electronic brake
- Manoeuvrable with dual rear wheels
- Lifting height 4000 mm (centre of yoke)
- Remote control for all hydraulic functions
- Waterproof according to ip65



*The Smartlift is  
easily transported  
in a van or on  
a trailer*

N.A. Christensensvej 39  
DK-7900 Nykøbing Mors  
Tel.: +45 97 72 29 11  
E-mail: smart@smartlift.dk  
www.smartlift.dk





The multifunctional, hydraulic rotary head




The Smartlift has side shift for exact adjustment of the window



The Smartlift has hydraulic movements in all directions




Remote control for all hydraulic functions

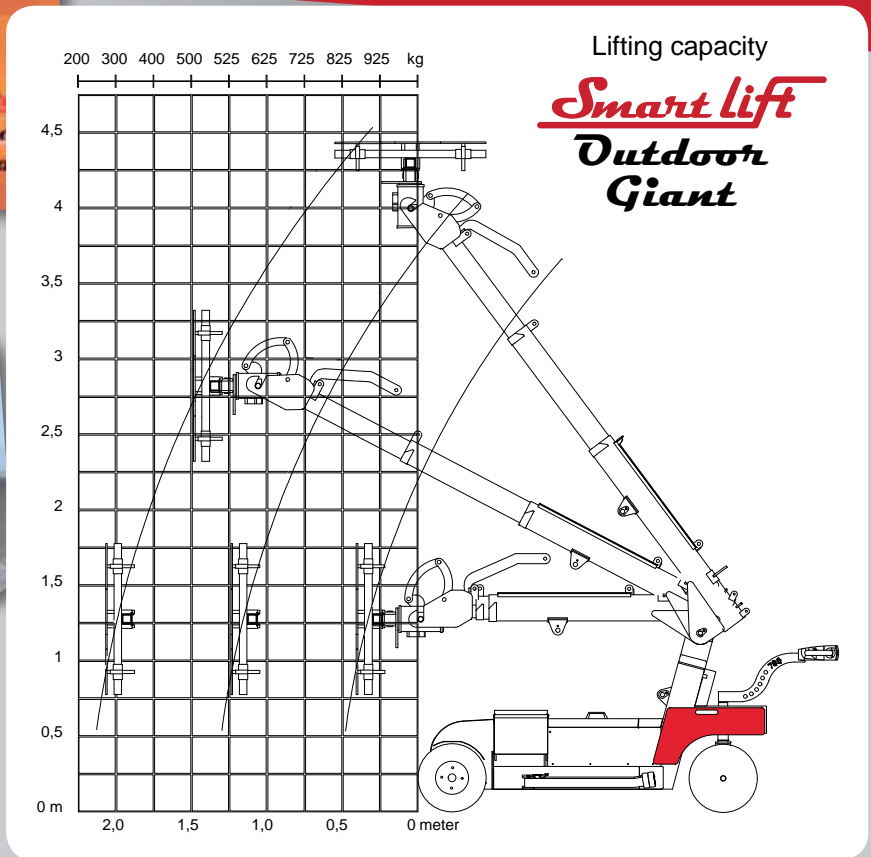

## Technical data

Description	Value
Total weight	1300 kg
Total height	1550 mm
Total width (min)	1010 mm
Total length (min)	2820 mm
Telescoping of arm	2 x 830 mm
Tip from horizontal	42° back/86° forward
Speed regulation	Stepless high/low
Side shift	100 mm
Vacuum system	2 circuits
Lifting height, ceiling installation	4400 mm
Charging voltage	230 volt
Integrated charger	
Charging time 25-100%	Approx 10 hours
Batteries (4 x 12 v) 24 volt	4 x 134 A AGM
Running period	Approx 8 hours
Frontwheel drive	2000 Watt-AC
Brake	Electric
Suctions pads	4 x Ø 400 mm and 2 x Ø 300 mm
Automatic suction	2 vacuum pumps
Lifting capacity, telescopic arm in/extended	825 kg/270 kg

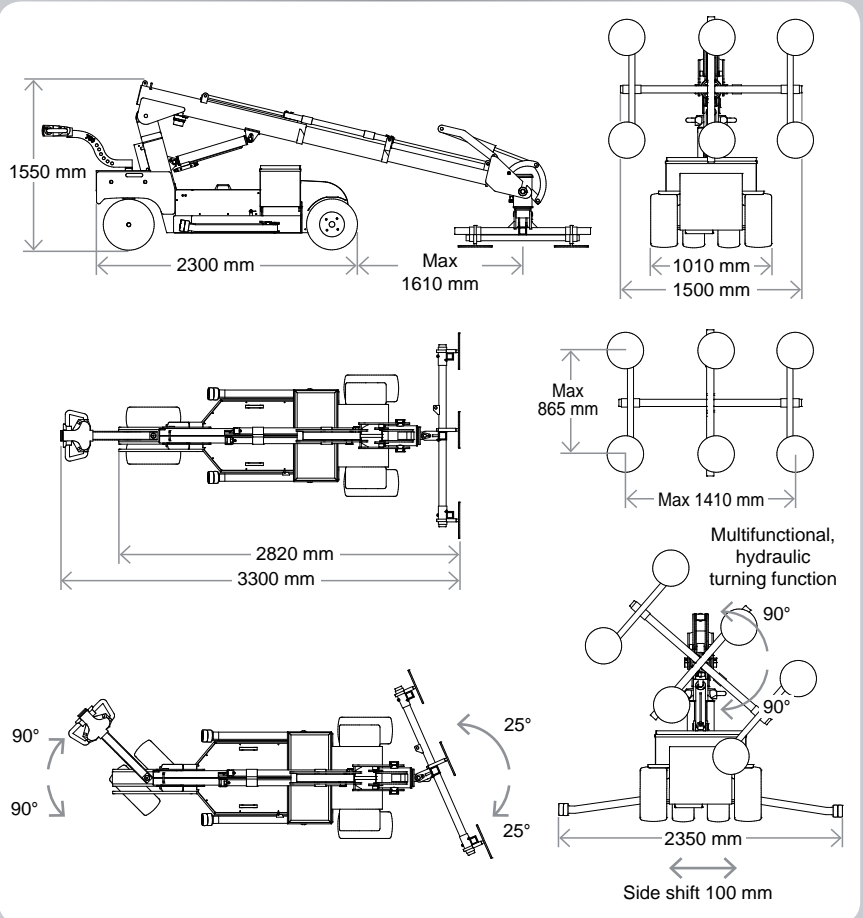

N.A. Christensensvej 39  
 DK - 7900 Nykøbing Mors  
 Tel.: +45 9772 29 11  
 E-mail: smart@smartlift.dk  
 www.smartlift.dk